


Name: \_\_\_\_\_  
 Date: \_\_\_\_\_  
 Track: \_\_\_\_\_

<b>Track Conditions</b>	Size:	<input type="checkbox"/> Open	<input type="checkbox"/> Med.	<input type="checkbox"/> Tight
	Traction:	<input type="checkbox"/> High	<input type="checkbox"/> Med.	<input type="checkbox"/> Low
	Surface:	<input type="checkbox"/> Smooth	<input type="checkbox"/> Med.	<input type="checkbox"/> Bumpy


### Front suspension

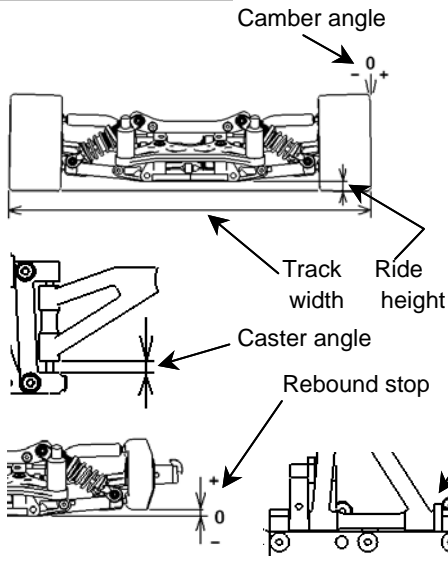


Track width	<u>252</u>	mm
Ride height	<u>5</u>	mm
Camber angle	<u>-1.5</u>	°
Caster angle	<u>2</u>	mm
Toe angle	<u>out 1</u>	°
Rebound stop	<u>0</u>	mm
Bump stop	<input checked="" type="checkbox"/> None <input type="checkbox"/> Use	
Lower arm spacer	<u>3</u>	mm
Upper arm position	<u>0</u>	mm
Anti-roll bar	<input type="checkbox"/>	

### Front shock


Piston	<u>Stock</u>
Oil #	<u>600</u>
Springs	<u>White</u>
Shock position	



### Steering ackerman




### Rear suspension

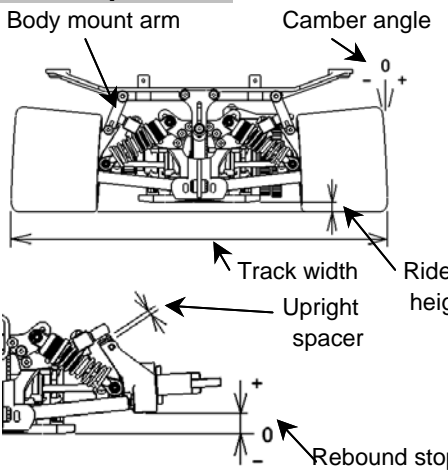

Track width	<u>263</u>	mm
Ride height	<u>6</u>	mm
Camber angle	<u>-3</u>	°
Toe angle	<u>in 1.5</u>	°
Rebound stop	<u>9</u>	mm
Bump stop	<input checked="" type="checkbox"/> None <input type="checkbox"/> Use	
Lower arm position(H0134)	<input type="checkbox"/> 4.5mm <input checked="" type="checkbox"/> 5.5mm <input type="checkbox"/> 6.5mm	
Upright spacer	<u>2</u>	mm
Anti-roll bar	<input checked="" type="checkbox"/> Wire	
	<u>3</u>	mm
	<u>3</u>	mm
	<input type="checkbox"/> Adjustable	

### Rear shock

Piston	<u>Stock</u>
Oil #	<u>600</u>
Springs	<u>White</u>
Shock position	



Body mount arm  Long(H0466C)  
 Short(H0466D)

### Engine

Type \_\_\_\_\_  
 Gasket \_\_\_\_\_ mm    Muffler \_\_\_\_\_  
 Plug \_\_\_\_\_    Fuel \_\_\_\_\_

### Clutch

Clutch shoe  Black     Gray     Red  
 Centrifugal shoe Light weight  
 Spring Super hard  
 Clutch bell clearance 0.4 mm  
 Spring adj. nut position 0.8 mm

### Tire

<Front>		<Rear>	
Type	_____	Type	_____
Dia.(start)	<u>L 69 /R 69</u>	Dia.(start)	<u>L 76 /R 76</u>
Dia.(finish)	<u>L /R</u>	Dia.(finish)	<u>L /R</u>

### Brake pad

Black     Yellow

### Body

Type PROTOform LOLA T530  
 Body position 10 mm  
 Rear spoiler 5 mm

### Drive ratio

Gear ratio		Side pulley
1st.	<u>17/49</u>	<input type="checkbox"/> 25T
2nd.	<u>20/46</u>	<input checked="" type="checkbox"/> 26T

### Result

Race time / Lap \_\_\_\_\_  
 Best lap (1Lap) \_\_\_\_\_

### Comments:

.....  
 .....  
 .....  
 .....