


Name: \_\_\_\_\_  
 Date: \_\_\_\_\_  
 Track: \_\_\_\_\_

**Track Conditions**

Size:  Open  Med.  Tight  
 Traction:  High  Med.  Low  
 Surface:  Smooth  Med.  Bumpy


### Front suspension

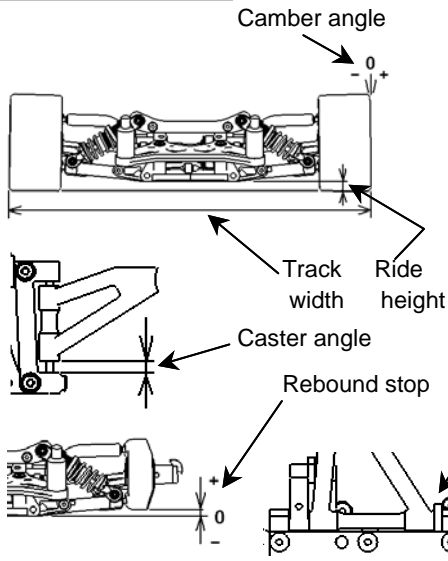


Track width 252 mm  
 Ride height 5 mm  
 Camber angle -1.5 °  
 Caster angle 2 mm  
 Toe angle out 1 °  
 Rebound stop 0 mm  
 Bump stop  
 None  Use  
 Lower arm spacer 3 mm  
 Upper arm position 0 mm  
 Anti-roll bar

### Front shock


Piston Stock  
 Oil # 600  
 Springs White  
 Shock position



### Steering ackerman




### Rear suspension

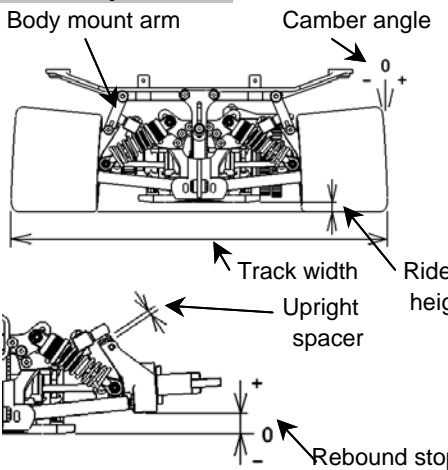

Track width 263 mm  
 Ride height 6 mm  
 Camber angle -3 °  
 Toe angle in 1.5 °  
 Rebound stop 9 mm  
 Bump stop  
 None  Use  
 Lower arm position(H0134)  
 4.5mm  5.5mm  6.5mm  
 Upright spacer 2 mm  
 Anti-roll bar  Wire  
 Adjustable 3 mm  
 Adjustable 3 mm

### Rear shock

Piston Stock  
 Oil # 600  
 Springs White  
 Shock position



Body mount arm  Long(H0466C)  
 Short(H0466D)

### Engine

Type \_\_\_\_\_  
 Gasket \_\_\_\_\_ mm Muffler \_\_\_\_\_  
 Plug \_\_\_\_\_ Fuel \_\_\_\_\_

### Clutch

Clutch shoe  Black  Gray  Red  
 Centrifugal shoe Light weight  
 Spring Super hard  
 Clutch bell clearance 0.4 mm  
 Spring adj. nut position 0.8 mm

### Tire

**<Front>**  
 Type \_\_\_\_\_  
 Dia.(start) L 69 /R 69  
 Dia.(finish) L /R

**<Rear>**  
 Type \_\_\_\_\_  
 Dia.(start) L 76 /R 76  
 Dia.(finish) L /R

### Brake pad

Black  Yellow

### Body

Type PROTOform LOLA T530  
 Body position 10 mm  
 Rear spoiler 5 mm

### Drive ratio

Gear ratio Side pulley  
 1st. 17/49  25T  
 2nd. 20/46  26T

### Result

Race time / Lap \_\_\_\_\_  
 Best lap (1Lap) \_\_\_\_\_

### Comments:

.....  
 .....  
 .....  
 .....